



**Barkman
Concrete**

I-Con Edger


**INSTALLATION
GUIDE**



STEP-BY-STEP INSTALLATION


Seven easy steps for installing Barkman I-Con Edgers.

The following directions are for the installation of Barkman I-Con Edgers. Before you start it is important to have your project fully designed on paper. If you require assistance with creating your design, or have any further questions regarding installation, please consult your Barkman dealer.

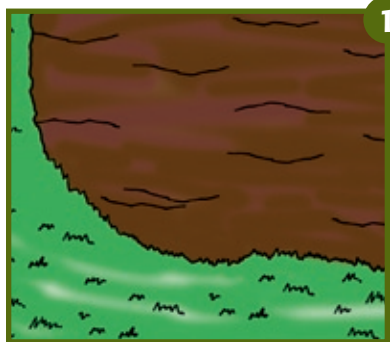


1 Create Design

Using a can of spray paint, or a long piece of garden hose, trace out the desired design for your edging on the ground. Now measure the total length of the line created to determine the number of edging units you will require (each Barkman I-Con Edger measures 12" long).

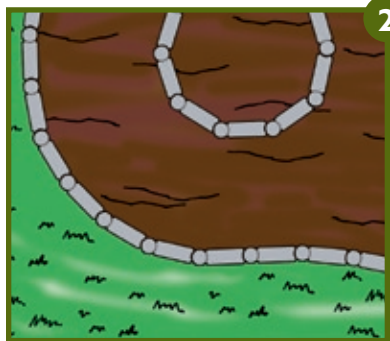

2 Align I-Con Edgers

Before you begin to excavate, take your I-Con Edgers and place them along the pattern they will follow. This allows you to make any final adjustments to your design, should they be necessary.

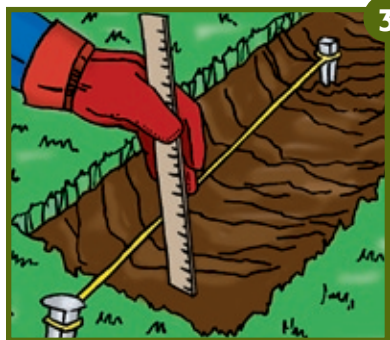

3 Determine Trench Depth

Before digging, determine how deep your trench should be, keeping in mind that you will require about an inch of base material beneath the stones and stone height is 4" (you will need a trench about 5" deep if you want your stones flush with the ground).



4 Excavate Trench

Using a flat spade, excavate your trench, removing any rocks or roots that may be present.




5 Prepare Trench Base

Add about 1" of sand or coarse granular material along the bottom of your trench. Level off base material.



6 Place I-Con Edgers

Now, place the I-Con Edgers, being careful each Edger is level front to back and side to side before proceeding to the next. Add or remove base material as required.

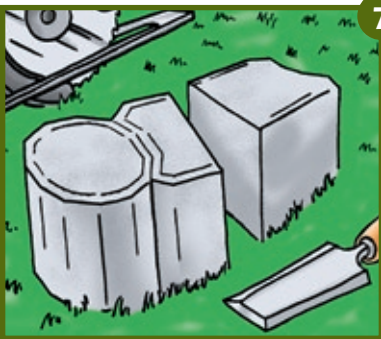

7 Cutting Edgers To Size

I-Con Edgers may be cut using a concrete saw to accommodate an abrupt change in direction or end of a run. Before cutting, be sure to read and follow directions on saw use. Wear safety glasses.




Barkman Concrete

Barkman Concrete Limited
Steinbach Sales Office (Head Office)
P.O. Box 1179
Steinbach, MB R5G 1A4
T 204.326.3445
F 204.326.5915
TF 1.800.461.2278
E sales@barkmanconcrete.com

Barkman Concrete Limited
Winnipeg Sales Office
909 Gateway Road
Winnipeg, MB R2K 3L1
T 204.667.3310
F 204.663.4854
TF 1.800.342.2879
E wpgsales@barkmanconcrete.com

www.barkmanconcrete.com

DIMENSIONS



12" x 3⁵/₈" x 4" H

EQUIPMENT NEEDED

Before starting, make sure to read through these instructions completely and assemble all the materials you will need for the project.

These will include:

- Sand or clean granular fill
- Wheelbarrow, carpenter's level, gloves, safety glasses
- Flat spade, hammer and chisel
- Rubber mallet
- Concrete saw with a diamond blade (available at rental store)
- Ruler and/or tape measure

CAUTION: Dry sawing or grinding of concrete products may result in the release of respirable crystalline quartz. Prolonged exposure to respirable crystalline quartz may cause delayed (chronic) lung injury (silicosis). The use of a NIOSH-Approved respirator and tight fitting goggles is recommended when sawing or grinding operations are in progress.

5/2007 40M